




1/4

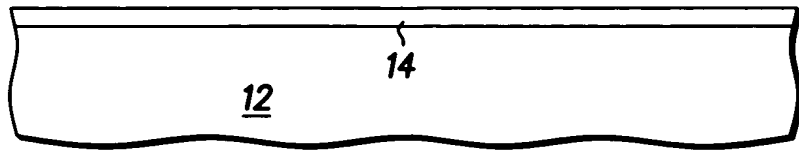


10 **FIG. 1**

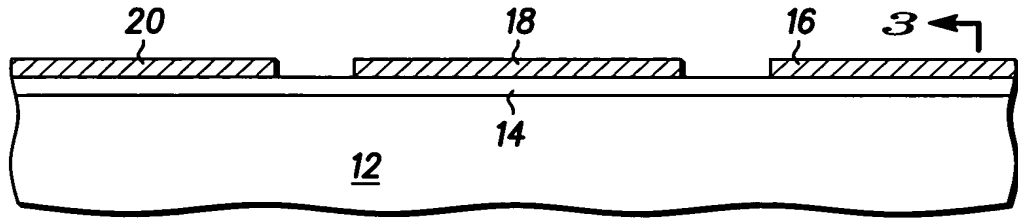


10 **FIG. 2**

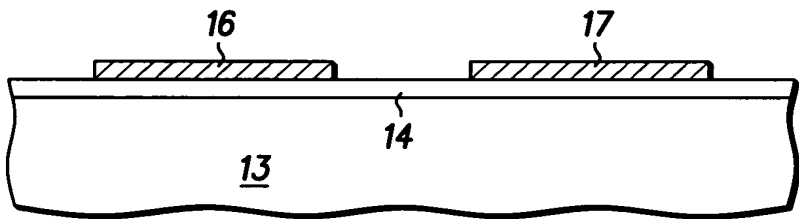

10 **FIG. 3**

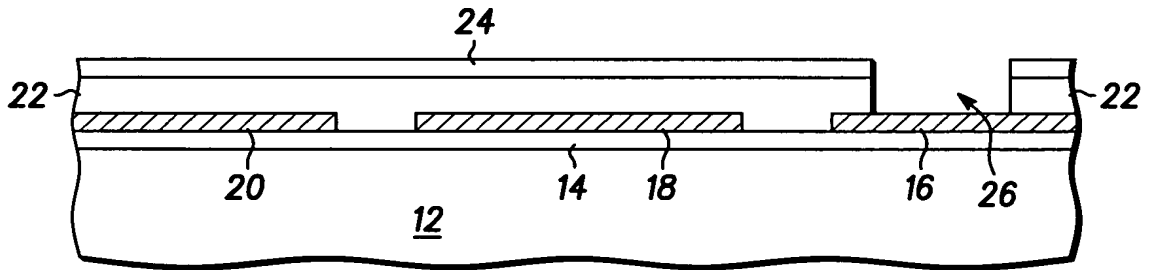

10 **FIG. 4**

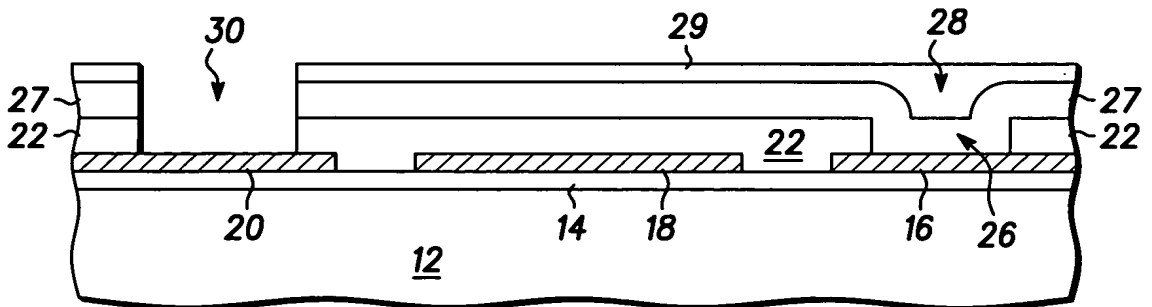

10 **FIG. 5**



10



10



10



10

11 ←



FIG. 10



└

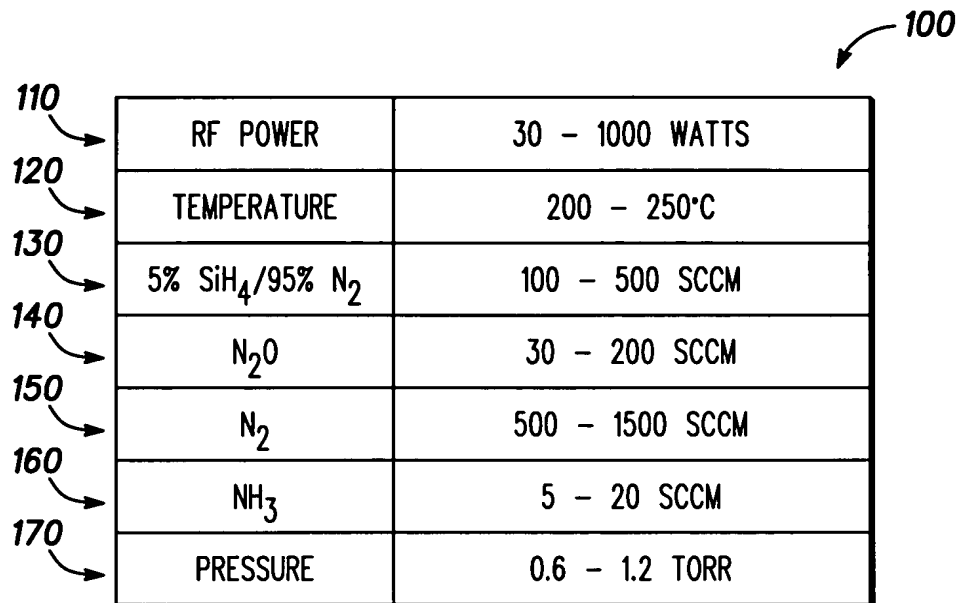


Diagram illustrating a table structure (100) with seven rows (110-170) and two columns. The rows are labeled on the left, and the table is labeled with 100 at the top right.

110	RF POWER	30 - 1000 WATTS
120	TEMPERATURE	200 - 250°C
130	5% SiH ₄ /95% N ₂	100 - 500 SCCM
140	N ₂ O	30 - 200 SCCM
150	N ₂	500 - 1500 SCCM
160	NH ₃	5 - 20 SCCM
170	PRESSURE	0.6 - 1.2 TORR

FIG. 12